

**BUCHER**  
municipal




Spreader

**Giletta One**



## Feeding system

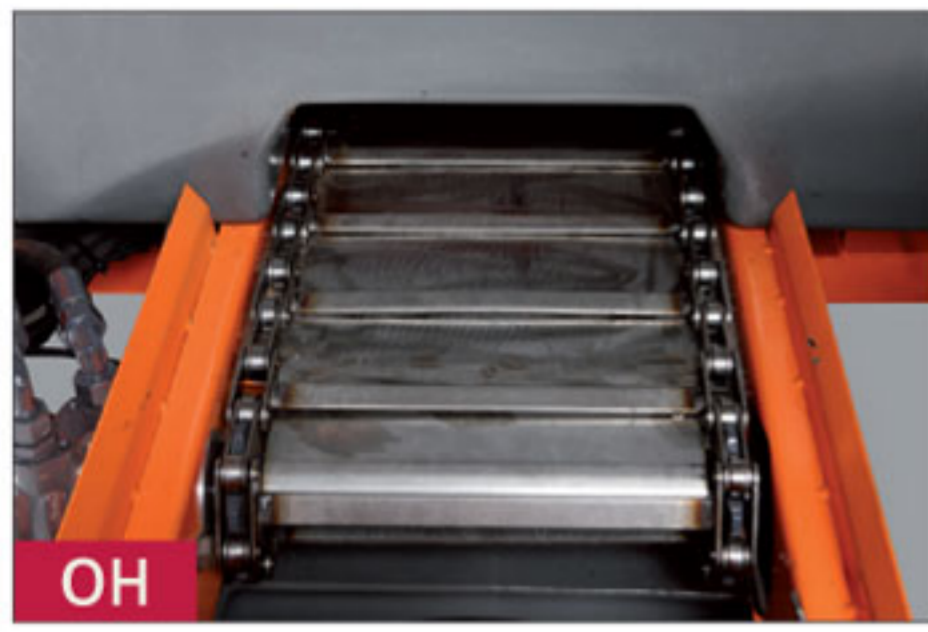


### Metal belt

The feeding system is realized by metal belt an AISI 304 stainless steel with cross-bars. The chain is guided by toothed pinions that enable a constant traction, maintaining a correct translation synchrony, without skidding.



### Rubber belt

The feeding system is realized by a double layer natural rubber belt with polyester and nylon core. The traction roller that moves the rubber belt is crowned to avoid side deviations and tired to minimize skidding.

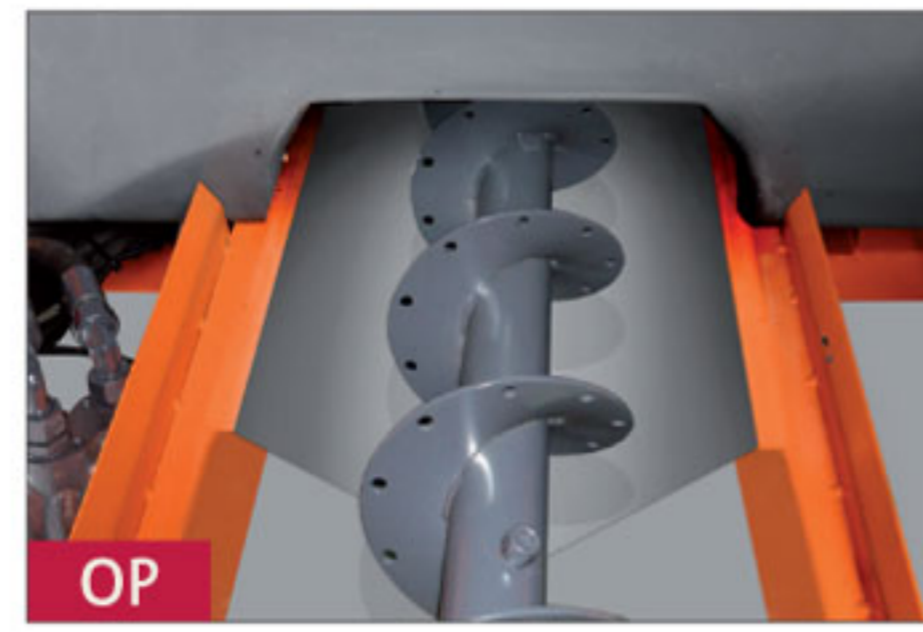

### Auger

The feeding system is realized by an auger with variable pitch turn. The bottom of the feeding system is realized by AISI 304 stainless steel to enable the passage of bigger lumps avoiding the auger blockage.



## Spreading system

The chute is realized in polyethylene HD (high density) with circular shape permitting excellent sliding features at low temperatures. The spreading disc is equipped with 6 blades realized in AISI 304 stainless steel for corrosion protection. Blades are adjustable according to adapt the material distribution to its granulometry.

## Driving systems




### Hydraulic

Driving through the vehicle hydraulic system, sized according to the European Standards EN15431.



### Auxiliary engine

Driving through the two-cylinders Diesel (A/D) or Petrol (A/HO) engine, air cooled.

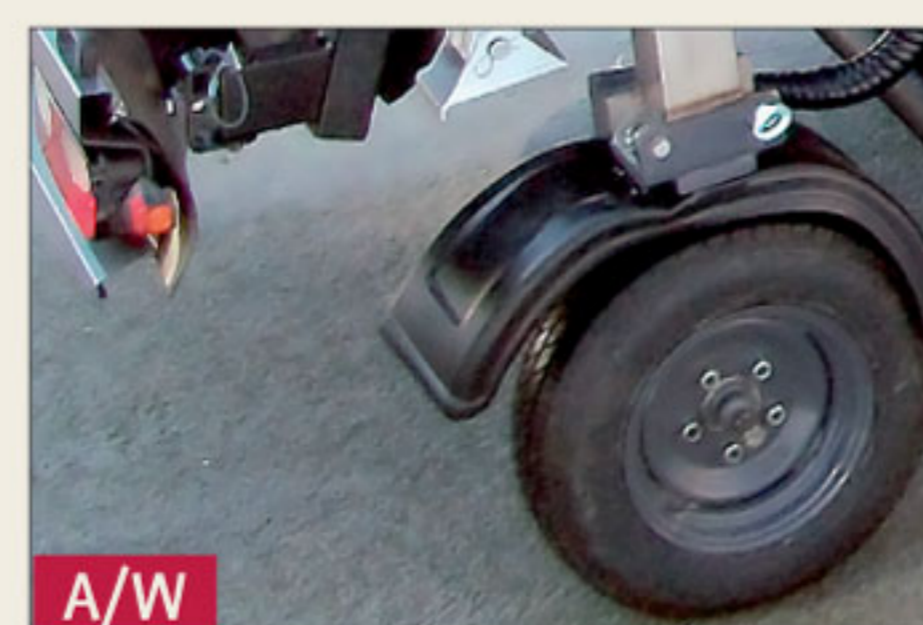


### Fifth wheel

Driving through a fifth wheel supported by a telescopic arm. The piston pump with anti-cavitation valve can work in front and rear direction.



## Working scheme

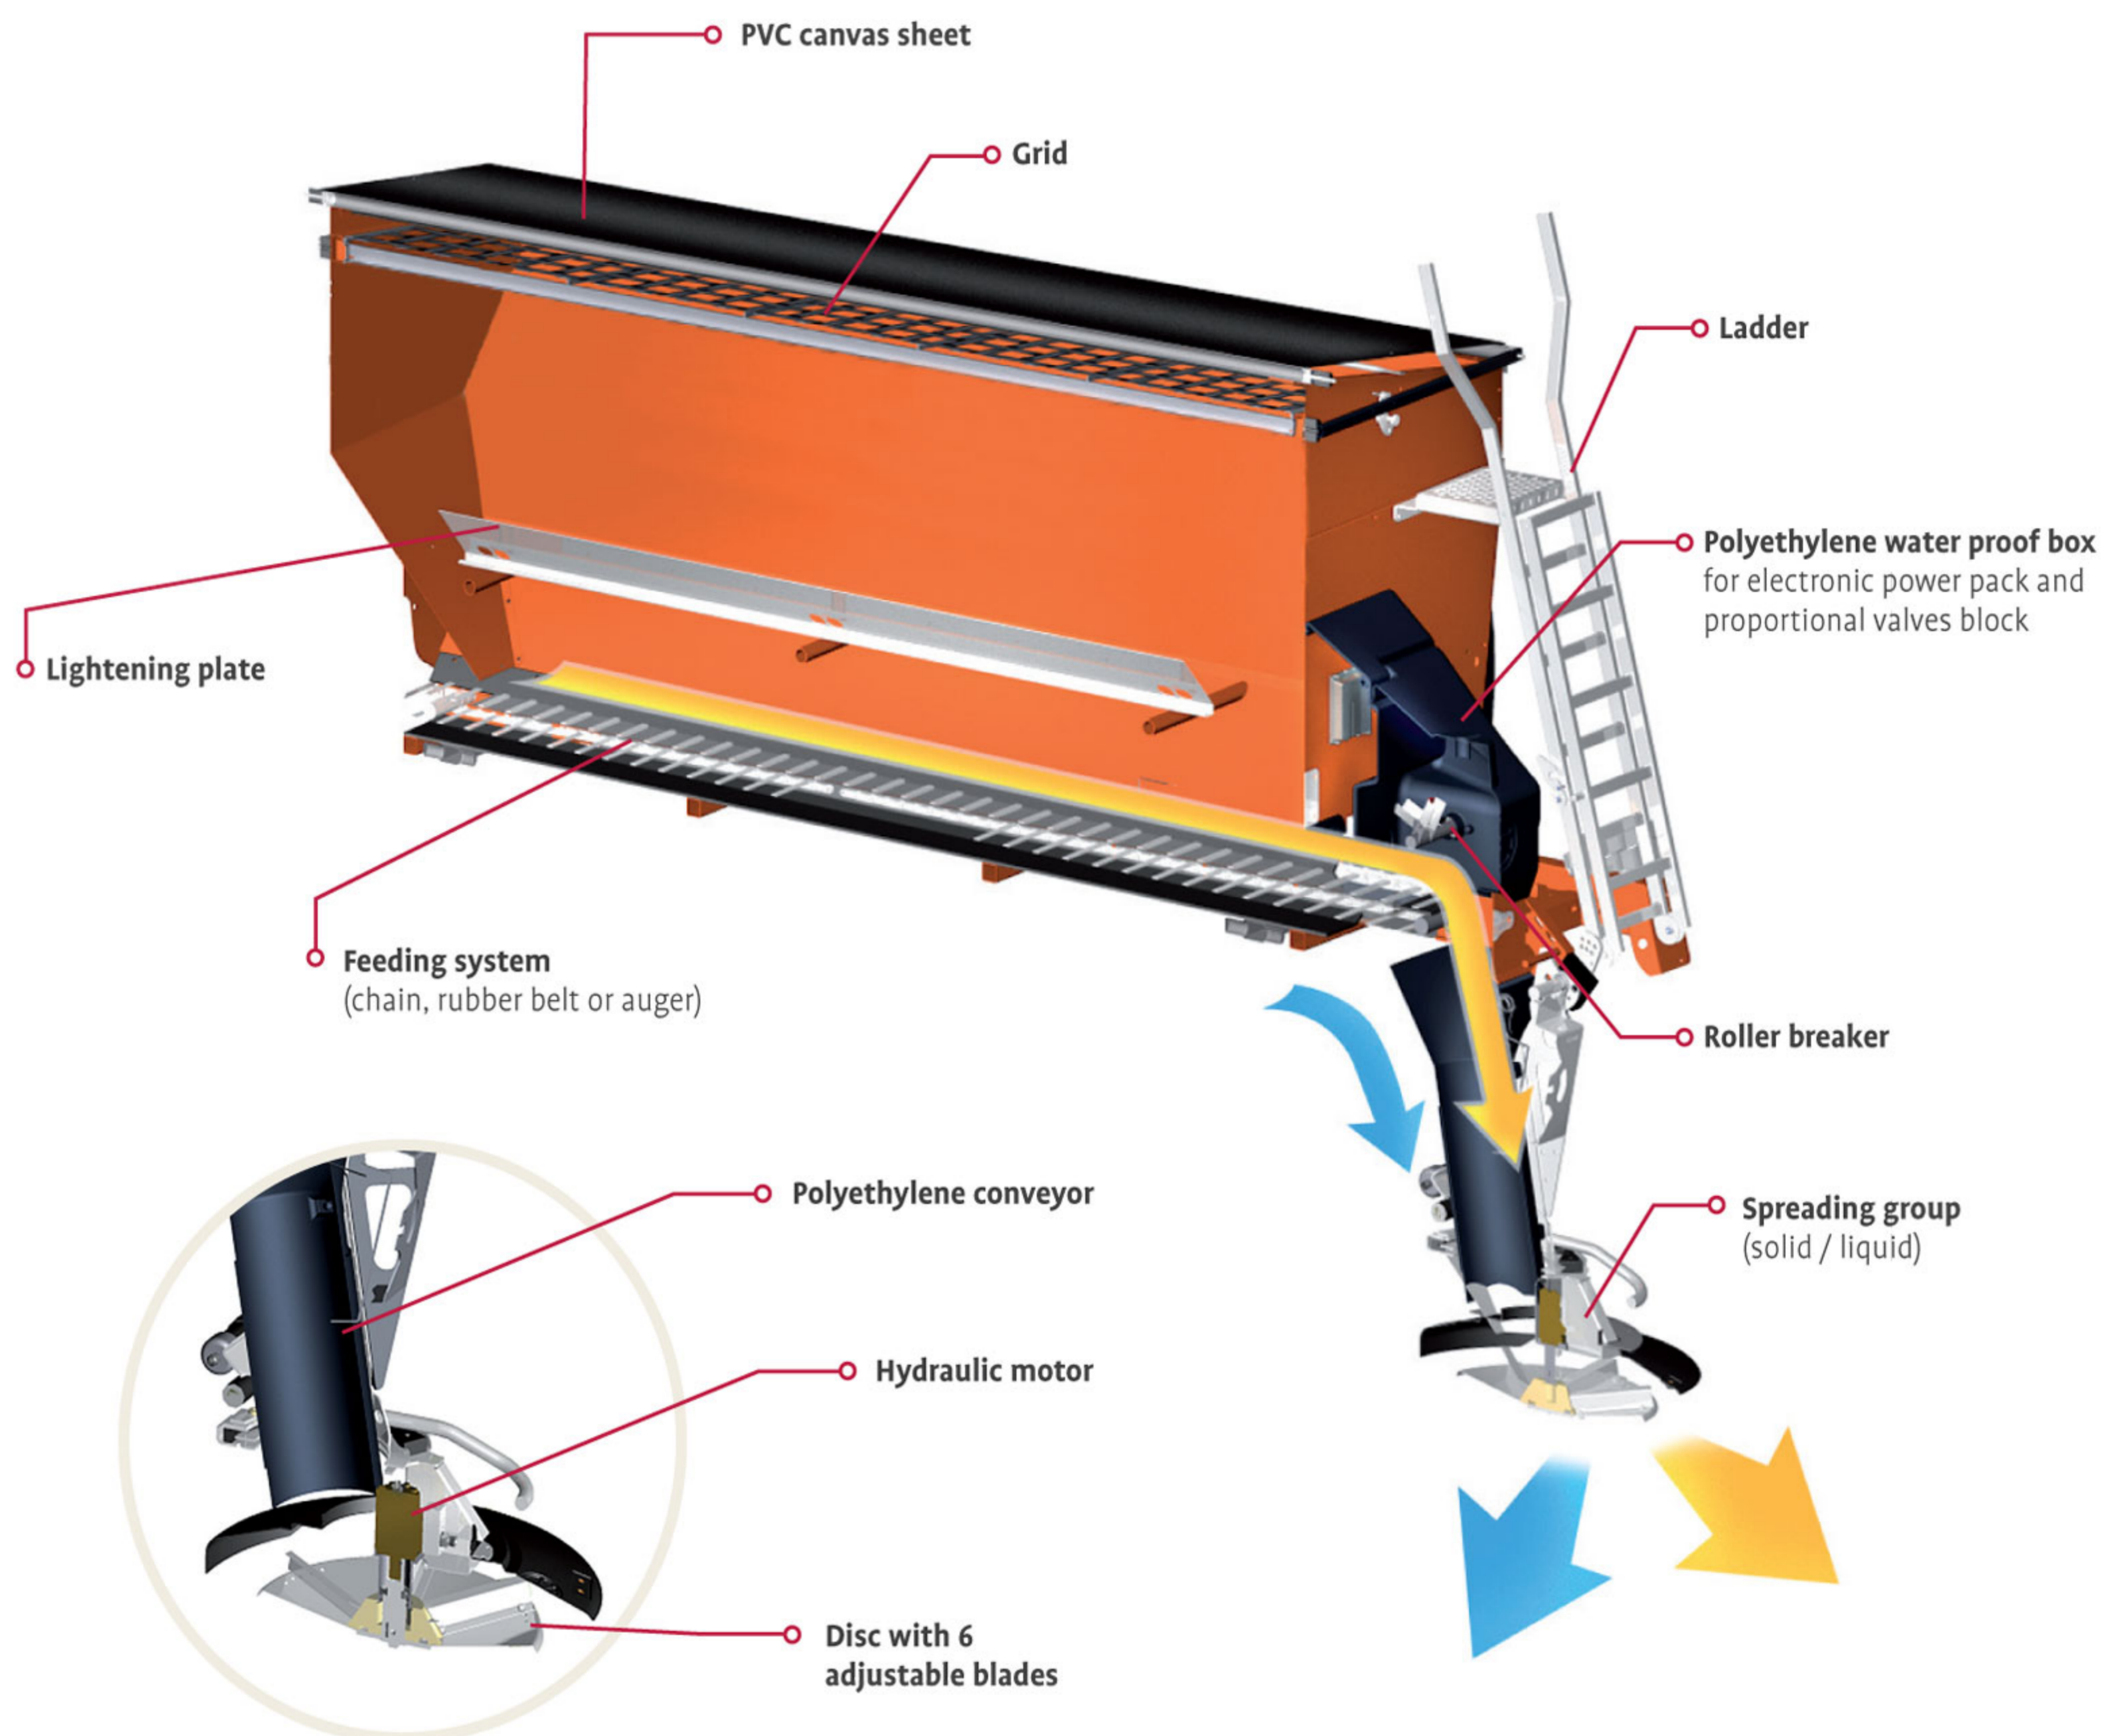

## Main options on request



C7

### Salt missing sensor


Salt missing sensor with visualization on the driver's cabin display.



G1

### Grid


Galvanized grid with 80x80 mm mesh.

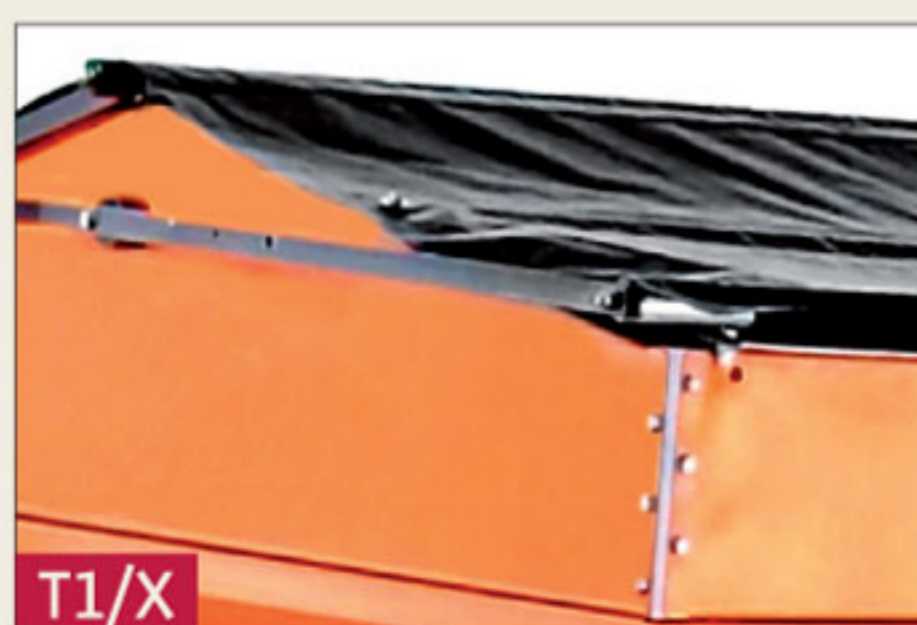

T1/X

### PVC canvas sheet

PVC canvas sheet manually opening from the ground with stainless steel structure.

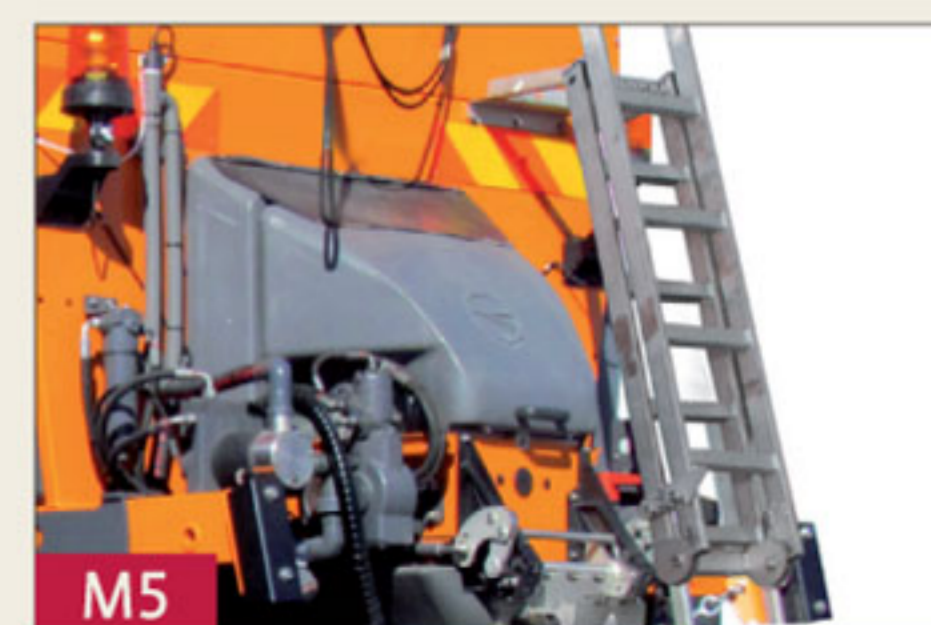


M5

### Ladder

AISI 304 stainless steel ladder for easy accessibility positioned in the rear right part.



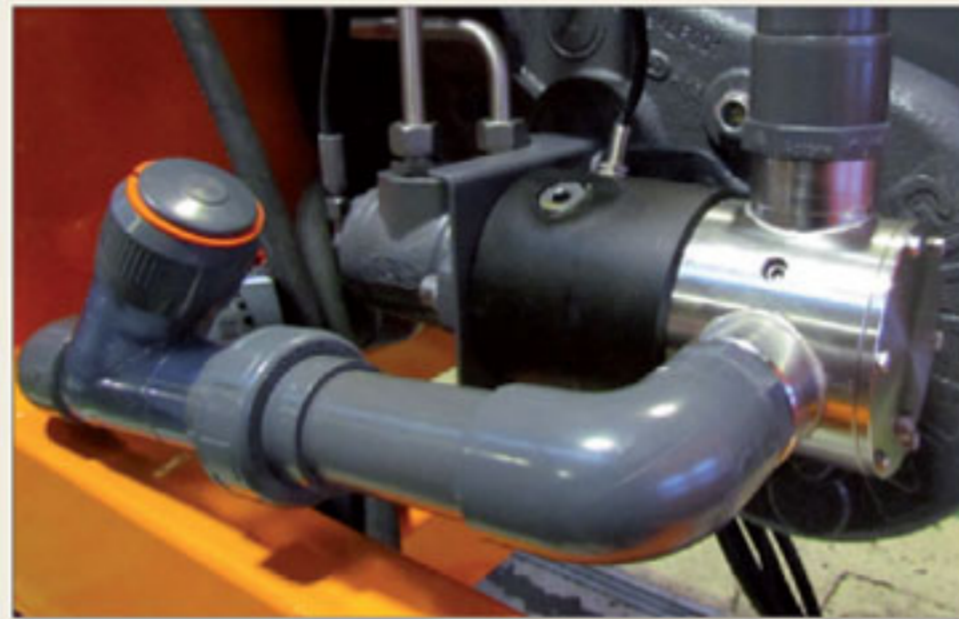

**U1**

## Humidifier system

The humidifier system is equipped with a volumetric pump directly coupled to the hydraulic motor, maintenance free. The Nitrile rotor does not need internal washing (only at the end of the season).

Tanks are realized with sturdy and light recyclable polyethylene. Solid/liquid ratio is regulated directly from the control box in the driver's cabin.

## Unloading system

### Unloading system P1

Unloading system with galvanized telescopic feet with crank. Higher front feet for easy loading on vehicles provided with side panels.

### Unloading system P3

Automatic unloading system for tipper, with front rollers and feet fitting into the spreader. Unloading can be made automatically from the driver's cab.

### Unloading system P4

Hook unloading system complete with slide, protection guard for the vehicle platform and adjustable height rear rollers.




## Asymmetry

Electric regulation of spreading asymmetry in 5 pre-settled positions.

<< | < | <> | > | >>

The regulation is controlled directly from the driver's cabin with possibility of manual regulation in emergency conditions.

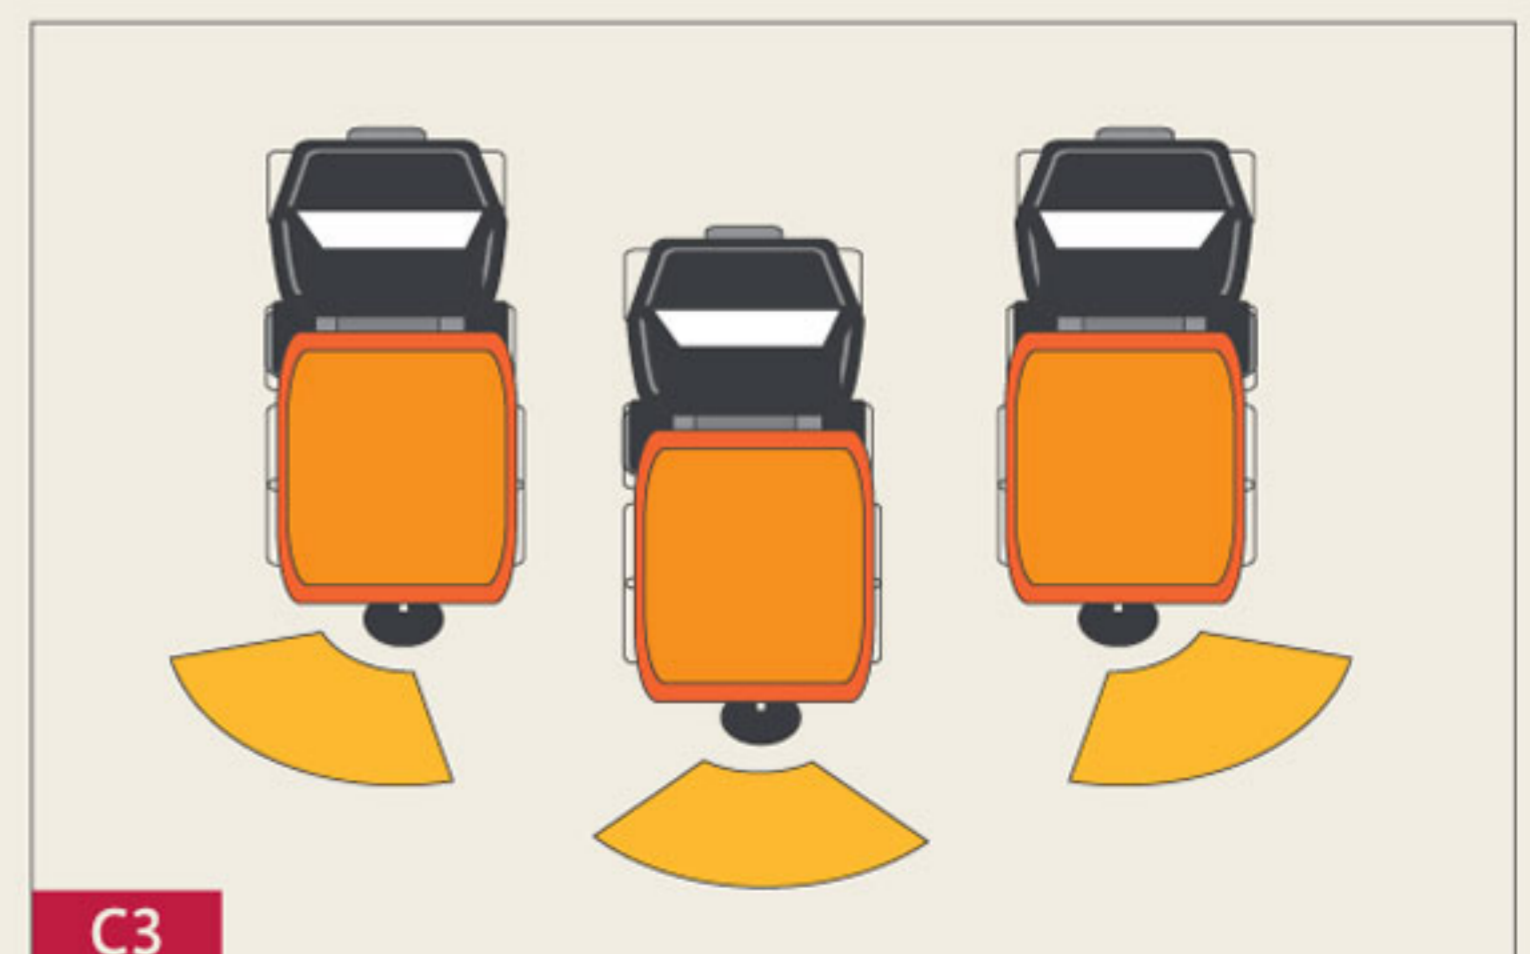





	OH2500	OK2500	OP2500	OH3500	OK3500	OP3500	
Hopper capacity	2,2+3,5	2,2+3,5	2,2+3,5	3+5	3+5	3+5	m <sup>3</sup>
Brine tank capacity	1600	1600	1600	2200	2200	2200	l
Min/max. spreading width	2+8 2+12*	2+8 2+12*	2+8 2+12*	2+8 2+12*	2+8 2+12*	2+8 2+12*	m
Min/max. salt dispensing capacity	5+40	5+40	5+40	5+40	5+40	5+40	g/m <sup>2</sup>
Min/max. grit dispensing capacity	20+350	20+350	20+350	20+350	20+350	20+350	g/m <sup>2</sup>
Hopper length	2550	2550	2550	3400	3400	3400	mm

\*spreading disc diameter 600mm

## Roller breaker

At the exit side of the chain or rubber belt feeding system, a hydraulically driven, transversal counter-rotating roller breaker with stainless steel blades is installed. With the Auger feeding system, the roller is offered as option (M10) and is longitudinally placed. The roller breaker enables a continuous material flow from the hopper to the spreading unit, breaking the salt lumps and thereby avoiding an uncontrolled drop.



## Ecosat<sup>10</sup>

Latest generation microprocessor control-systems, with maximum flexibility in programming and visualisation of the different spreading parameters: width, asymmetry and dosage depending on the vehicle speed.

**Six different tools  
in all-in-one control box**







■ **Giletta LLC**  
Kaluga

■ **Gmeiner GmbH**  
Wernberg-Köblitz

■ **Bucher Municipal**  
Niederweningen

■ **Arvel Industries Sarl**  
Coudes

■ **Giletta SpA**  
Revello (CN)

■ **Giletta SpA**  
Gaggio Montano (BO)

■ **Maquiasfalt S.L.**  
Madrid

## **Giletta SpA**

Via A. De Gasperi, 1  
I-12036 Revello (CN)  
tel. +39 0175 258 800  
fax. +39 0175 258 825  
giletta@buchermunicipal.com

[www.buchermunicipal.com](http://www.buchermunicipal.com)

## **////:HANES**

Strojírenská 259  
CZ 150 21 Praha 5  
Tel.: +420 220 190 610  
Fax: +420 220 190 620  
info@hanes.cz

[www.hanes.cz](http://www.hanes.cz)

## **////:HANES**

Pri kalvárii 20  
SK 917 01 Trnava  
Tel.: +421 335 921 910  
Fax: +421 335 545 000  
info@hanes-slovakia.cz

[www.hanes-slovakia.sk](http://www.hanes-slovakia.sk)